Fabry-Perot Fiber Optic Filter

Down to 0.01 nm peak width, Up to 150 nm tuning range, kHz speed, 1060, 1310, 1550 nm

DATASHEET

Return to the Webpage



The FPTF is a fiber-coupled Fabry-Perot Tunable Filter based on a fiber tip-gap etalon cavity driven by a piezoelectric actuator. It features narrow linewidth, wide tuning range, low optical loss, and fast tuning speed. The tuning range exceeds 100 nm, corresponding to the etalon's first-order free spectral range (FSR). Tuning beyond one FSR enters higher interference orders, potentially degrading signal quality. The piezo actuator supports scanning rates up to ~1 kHz, with resonant operation near 30 kHz. Due to inherent piezo drift, closed-loop feedback is recommended for wavelength stabilization. A full-function controller with small-amplitude dithering is available for precise tuning and control. The filter remains transparent outside its tuning band. The FPTF provides a cost-effective solution for high-speed wavelength scanning, spectroscopy, and tunable source applications requiring moderate finesse and rapid tuning.

Features

- Narrow Line Width
- Wide Tune Range
- Low IL and PDL
- Fast Tuning Speed
- USB, RS232, I2C Control Interfaces
- Gaussian-Shaped Passband

Applications

- FBG Sensing Interrogation
- Wavelength Scanning

Specifications

Parameter	Min	Typical	Max	Unit
Center Wavelength	980	1550	2600	nm
Free Spectral Range (FSR)	2	100	140	nm
FSR Variation over Tuning Range			0.05%	
Finesse [1]	10		1000	
Scanning Speed	-		2	kHz
Resonance Scanning Speed		30		kHz
Insertion Loss [2]	2.5	3	4.5	dB
Bandwidth @-3dB or FWHM [3] (FSR/Finess)	0.01	0.08	0.25	nm
Off-Band Suppression	25	30	-	dB
PDL	-	0.15	0.35	dB
PMD	-	-	0.2	Ps
Return Loss	40	-	-	dB
Optical Power Handling [4]			100	mW
Driving Voltage		20	70	V
Capacitance			3	µF
Operating Temperature	-5	20	70	°C
Storage Temperature	-40	-	85	°C
Weight		60	100	G

Notes:

[1]. Finesse ± 20%

[2]. It is defined as the total light coupled out over the filter's spectral passing band. Measured using a broadband light source with integration of the transmission peak. Extra loss can occur if the laser source does not match the filter profile. A special filter can be made to match the application. The smaller the fiber core, the higher the loss. Excluding connector loss

[3]. Bandwidth tolerance are ± 20%

[4]. It related to the linewidth, the narrower, the smaller

RoHS COMPLIANT

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link]:

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 11/14/26

P +1 781-935-1200 E sales@agiltron.com W www.agiltron.com


Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Fabry-Perot Fiber Optic Filter

Down to 0.01 nm peak width, Up to 150 nm tuning range, kHz speed, 1060, 1310, 1550 nm

DATASHEET

Mechanical Dimension (mm)

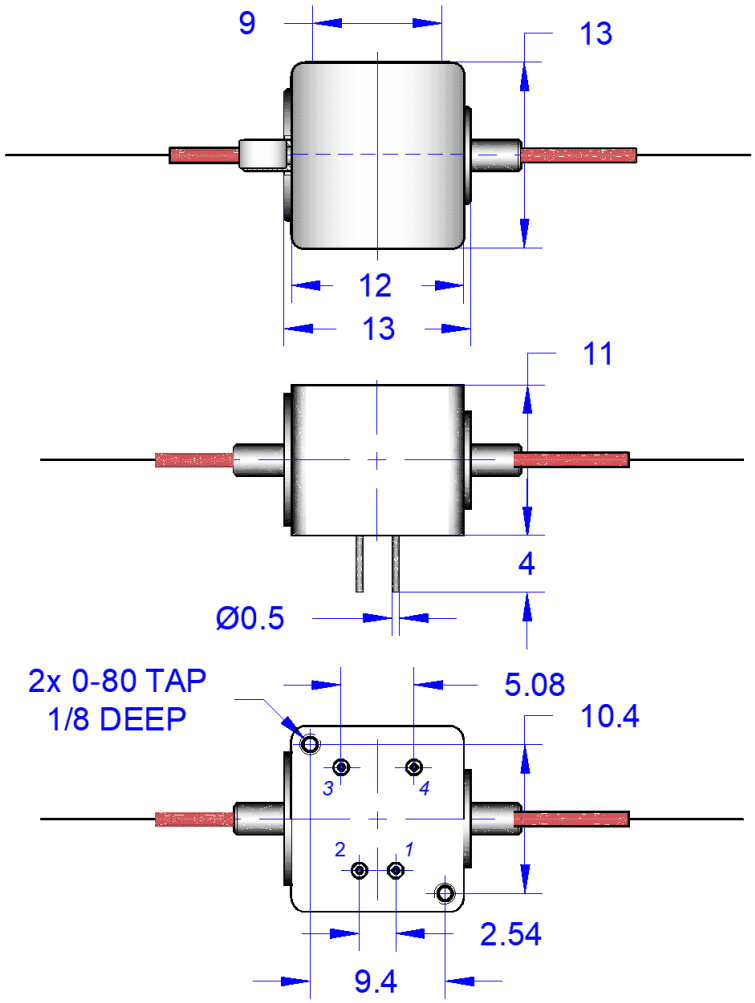

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.


Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Fabry-Perot Fiber Optic Filter


Down to 0.01 nm peak width, Up to 150 nm tuning range, kHz speed, 1060, 1310, 1550 nm

DATASHEET

Typical Transmission Curve

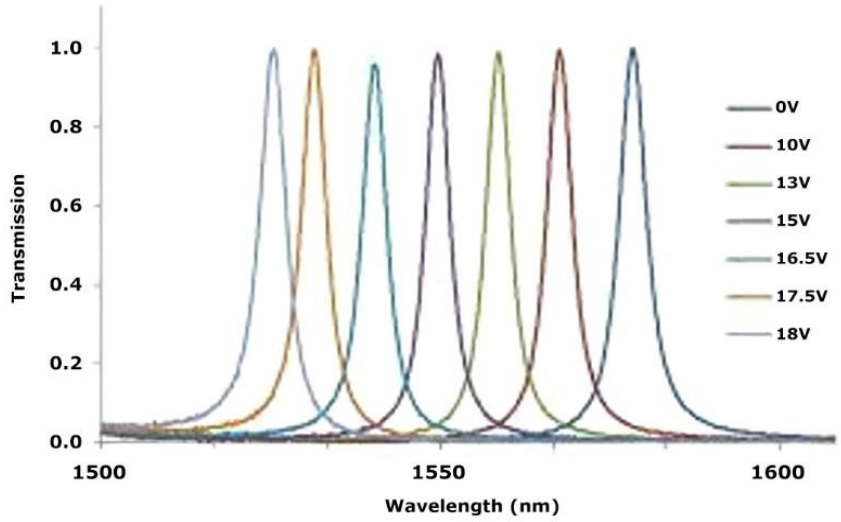

Typical Wavelength Tuning vs Voltage

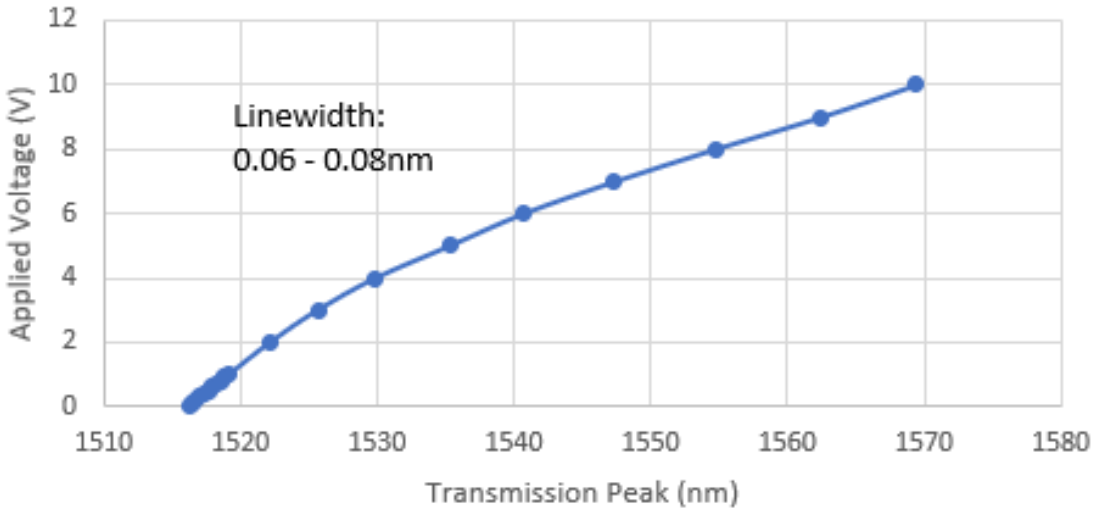


Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Fabry-Perot Fiber Optic Filter

Down to 0.01 nm peak width, Up to 150 nm tuning range, kHz speed, 1060, 1310, 1550 nm

DATASHEET

Bandwidth/Linewidth Definition

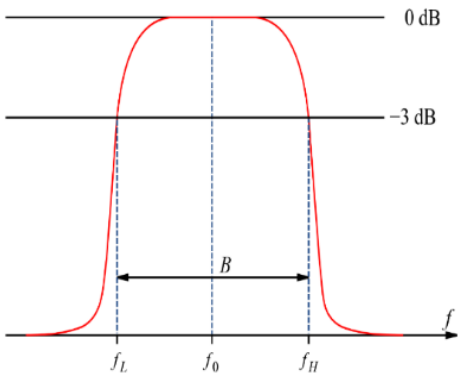

Ordering Information (Part Number)

	□□□	□□	□□□	1	□	2	□	□
Prefix	**Center Wavelength**	**Tuning Range (FSR) [1]**	**Linewidth [2]**	**Fiber Type**	**Fiber Cover**	**Fiber Length**	**Connector [3]**	**Package [4]**
FPTF-	1550 (1520-1570) = 550 1310 (1260-1360) = 310 1420 (1360-1480) = 420 1500 (1480-1520) =500 1580 (1520-1620) = 580 1600 (1570-1620) = 600 Special = 000	10nm = 01 30nm = 03 40nm = 04 50nm = 05 80nm = 08 100nm = 10 120nm = 12 Special = 00	2 nm = 200 0.3 nm = 030 0.1 nm = 010 0.07 nm = 007 0.05 nm = 005 0.03 nm = 003 0.01 nm = 001 0.007 nm = A70 0.003 nm = A30 0.0007 nm = A07 Special = 000	SMF-28 = 1 Special = 0	0.9mm tube = 3 Bare fiber = 1	0.25 m = 2 1.0 m = 1 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 Special = 0	Regular = 1 Space Grade = 2 with Sensor = 3 with Controller = 4

[1]. ± 30nm, Tuning range ~ FSR and always >8nm

[2]. Finesse = FSR/Linewidth; 10/2=5, 50/0.1=500, (Finesse ± 20%)

[3]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.

The default PM fiber connector is **2.0 mm narrow key, with the fiber slow axis aligned to the key**.

[4]. We have an integrated capacity position sensor that is temperature insensitive, providing a repeatable feedback wavelength control.

Red is special order with NRE

Controllers

Piezoelectric devices have material related temperature dependence and hysteresis, resulting in drift and poor repeatability. The mechanical devices also have intrinsic resonance frequencies; operation should below these frequencies. The controller can stabilize and lock the peak positions as well as perform scanning.

$8450

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Fabry-Perot Fiber Optic Filter

Down to 0.01 nm peak width, Up to 150 nm tuning range, kHz speed, 1060, 1310, 1550 nm

DATASHEET

Operation Manual

1. Only available along with the product shipment.

How to test the insertion loss of a tunable optical filter

The filter only works in a specific range. Beyond this range, extra peaks may show. These peaks can be blocked with special order. Please follow these instructions to do an optical insertion loss test:

1. Connect a broadband fiber-coupled laser source to OSA, sweep one time over the specified range of the tunable filter, and then fix the curve in Trace A as a reference.
2. Connect the broadband laser source to the fiberoptic tunable filter fiber as input, then connect the other fiber port of the tunable filter as the output to the OSA.
3. Set OSA Trace B as 'write,' Trace C as 'Calculate: B-A.' Auto sweep Trace C from the specific range. Tune the micrometer to shift the peak at a different wavelength. Use 'Peak search' to record IL at a different wavelength."

Application Notes

Fiber Core Alignment
Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness
Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power
Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.


Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Fabry-Perot Fiber Optic Filter

Down to 0.01 nm peak width, Up to 150 nm tuning range, kHz speed, 1060, 1310, 1550 nm

DATASHEET

Regular Single Mode / Polarization Maintaining Fiber Optical Power Handing vs Wavelength

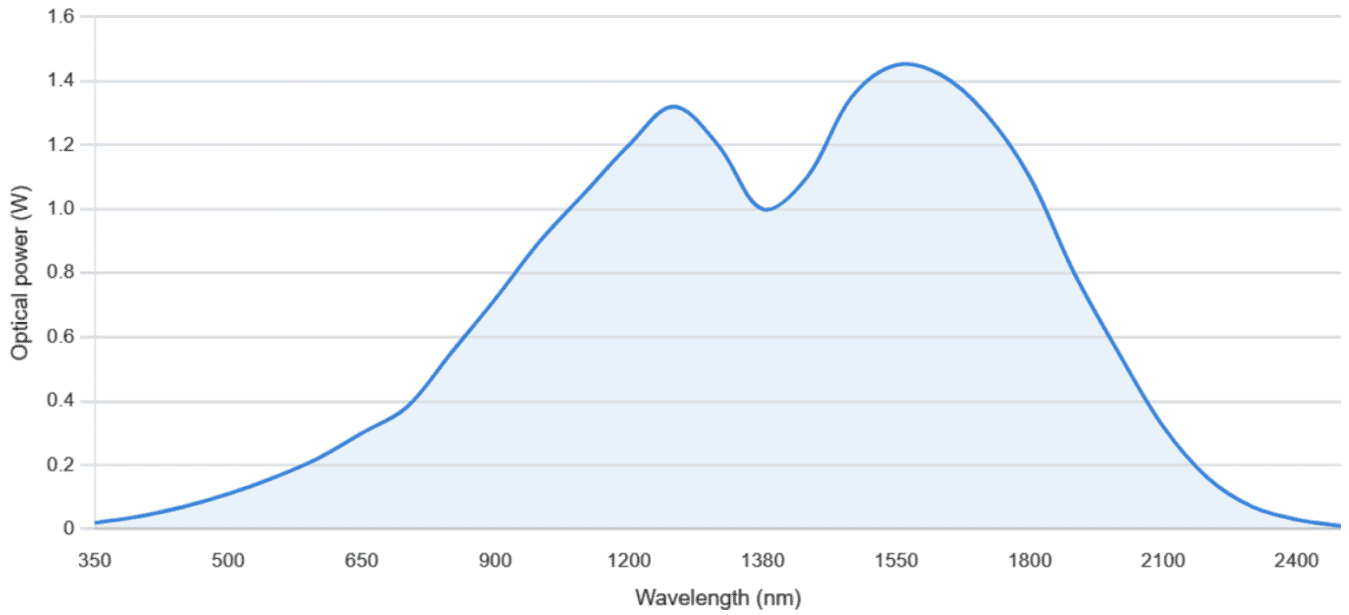

Single mode fiber optical power is limited by nonlinear effects in addition to absorption that increase loss and generate heat. The curve shows the approximate safe CW power envelope for standard single-mode fiber. Actual limits depend on fiber design, core size, length, and laser characteristics. Specialty fibers can significantly increase the power limit.

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.