Power Supply SDC 12 1000 12VDC, 1A





DATASHEET

Return to the Webpage 💃



Power Supply 12VDC, 1A. Switches, Attenuators, Lasers, Modulators

Features

- 12VDC
- 1A

Applications

- Power Supply
- Switches, Attenuators, Lasers, Modulators

Specifications

Parameter	Min	Typical	Max	Unit
Output Voltage		12		VDC
Output Current		1		Α
Connector Type	2.1/5.5 mm Phono Plug			
Compatible Products	Switches, Atte			

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this <u>link</u>]:

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 05/21/25

© Photonwares Corporation

P +1 781-935-1200



www.agiltron.com

Power Supply SDC 12 1000 12VDC, 1A







DATASHEET

Mechanical Dimensions (mm)

Mechanical Dimensions (mm) -- Connector

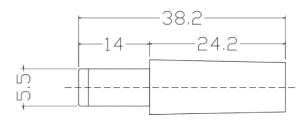

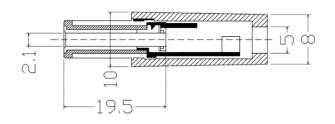

Electrical parameter

Project	Parameter		
Connector pin out			
Current rating/Voltage	5A/50V		
Insulation resistance	≥100MΩ		
Contact Impedance	≤50mΩ		
Withstanding voltage	≥1500VAC/1min		
Durability	≥1X100000 Cycles		

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

© Photonwares Corporation

P +1 781-935-1200

E sales@photonwares.com

www.agiltron.com

Power Supply SDC 12 1000 12VDC, 1A





DATASHEET

Ordering Information

				1	1	1	1
Prefix	Output Voltage	Output Current	Connector Type				
SDC-	12VDC = 12	1A = 10	2.1/5.5 mm Phono Plug = 1				

need to check

Application Notes







Power Supply SDC 12 1000 12VDC, 1A






DATASHEET

Power Connector

Power Barrel Connector Jack 2.00mm ID (0.079"), 5.50mm OD (0.217") Through Hole, Right Angle

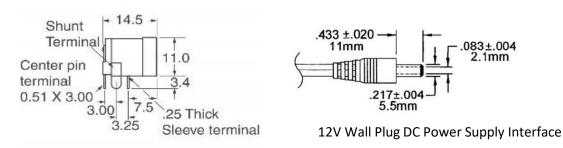

^{*}Product dimensions may change without notice. This is sometimes required for non-standard specifications.